

## GENERATOR MODEL: P200

<b>Frequency/Speed - Voltage</b>	<b>50HZ / 1500RPM - 230/400V</b>	
<b>Prime Power</b>	200 KVA	160 KW
<b>Standby Power</b>	220 KVA	176 KW


## FEATURES:

- **Warranty: 1 year or 1000 hours.**
- **Low fuel shutdown safety.**
- **24/7 after sales support.**
- **Generator made by OEM Perkins-UK.**
- **Perkins as the world's leading power manufacturer since 1932.**
- **Advance digital control system, Long service life, Easy to Operate, Low Fuel consumption, Anti vibrating Isolators.**
- **Automatic start (optional) ecofriendly.**
- **Easy and economical availability of Spares.**



## Dimensions

(L x W x H) = 118" x 46" x 55"

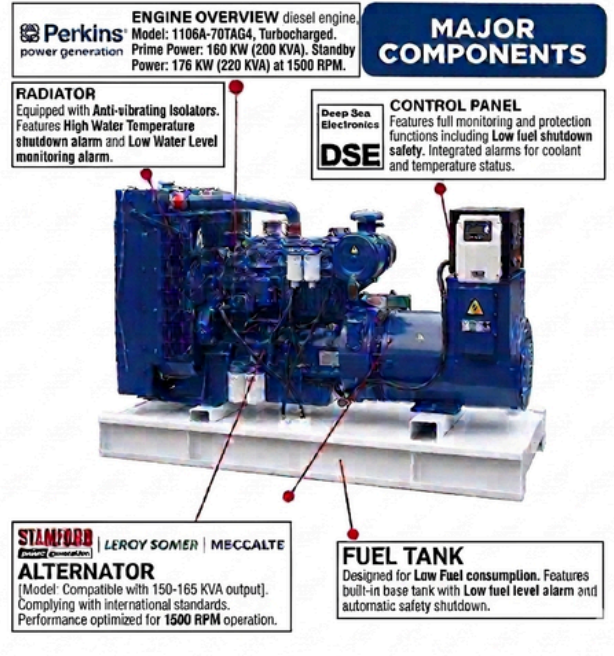

## Engine

Perkins-UK, Model 1106A-70TAG4, in accordance to ISO3046, ISO 8528, DIN 6271



## Alternator

Leroy Somer-France / Meccalte-UK Stamford UK Complying to the following Norms:  
CEE/CE12/3/EN60034-1 / IEC34-1/VDE



## Control Panel

Deep Sea DSE-4520, Made in UK, Complying to the norms: BS EN 61000, BS EN 60950, BS EN 60068



## Fuel Tank

The overall fuel tank capacity of 200 KVA Perkins 160 LTR.

## PERKINS ENGINE TECHNICAL DATA

### MODEL: 1106A-70TAG4

SPECIFICATION	DETAILS
<b>Number Of Cylinders</b>	6
<b>Engine Build</b>	In Line
<b>Bore</b>	105 mm
<b>Stroke</b>	135 mm
<b>Displacement</b>	7.0 L
<b>Compression Ratio</b>	16.0:1
<b>Aspiration</b>	Turbocharged
<b>Cooling</b>	Air to Air
<b>Fuel Tank</b>	Built in fuel tank for at least 10 hours operation @ full load
<b>Fuel System</b>	75 % Direct Injection
<b>Fuel Recommended</b>	N° Diesel
	1500 RPM
<b>Delivery Flow Rate (l/hr)</b>	
<b>Fuel Consumption</b>	
100% Load (g/kwh-L/hr)	40.2
75% Load (g/kwh-L/hr)	35
50% Load (g/kwh-L/hr)	19.7
<b>Engine Coolant Capacity</b>	27 L
<b>Air Flow Radiator</b>	TBA
<b>Radiator with 50 degree ambient</b>	-

## PERKINS ENGINE TECHNICAL DATA

SPECIFICATION	DETAILS
Cooling Package & Air Cleaner	-
Thermostatically-Cntroled	-
Air Intake Engine (Clean Filter/Dirty)	TBA
Exhaust Gas Tempreature	TBA
Exhaust Gas Flow (Prime)	TBA
Maximum Exhaust System Back	
Pressure	6 Kpa
Stainless Steel Exhaust Flex	-
Cranking Battery Voltage	12 V
Battery Charging Alternator	85 A
DC Vlotage Monitoring Via	-
Radiated Heat to Ambient	TBA
Heat Rejection to Coolant	TBA
Heat Rejection to Exhaust	TBA
Heat Rejection to intercooler	TBA
Lubricating Capacity	16.5 LTRS
Governor	Mechanical

## ALTERNATOR TECHNICAL DATA

PARAMETER	SPECIFICATION
<b>Insulation System</b>	Class H
<b>Winding Pitch</b>	2/3 to Minimize Harmonics effects
<b>Number of Poles</b>	4
<b>Number of Bearings</b>	Single Bearing
<b>RPM</b>	1500 RPM
<b>Power Factor</b>	0.8/1
<b>Regulation</b>	± 1%
<b>Frequency</b>	50 Hz
<b>Voltage Range</b>	380-415 / 220-240
<b>IP Rating (Protection)</b>	Ip23

## CONTROL MODULE

### DEAP SEA MODEL: DSE 6020



#### INDICATORS

- Operating Hours
- 3 Phase Generator Voltage Sensing & Monitoring
- Current Protection & Monitoring
- Power Measurement (kW, kVA, kVAR, kWh, kVAh, kVARh, pf)
- Frequency Monitoring (Hz)
- Oil Pressure/Coolant Temperature
- Battery Voltage Monitoring (DC)
- Alarm Acknowledge



#### CONTROLS

- Engine Cool Down Timer
- Emergency Stop Push button/ Alarm Acknowledge
- Warm-up Timer
- Load Switching Timer
- Engine Cycle Crank



#### WARNING & SHUTDOWN ALARM

- Generator Over/Under Voltage & Frequency
- Crank Disconnect (Failure to Start)
- Under/Over Speed
- Over Current
- Low Oil Pressure
- High Water Temperature
- Low Fuel Level
- Low Water Level



#### FEATURES

- User Friendly
- Compatible With CAN Engines
- License Free Software
- Largest Backlit Icon Display In Its Class
- Fully Configured Via The Fascia Or Pc Using Usb
- Efficient Power Save Mode